



KR-S61A-BT





BLE







Card

Low voltage alarm

Emergency power









White

Remote upgrade

Public mode Private mode

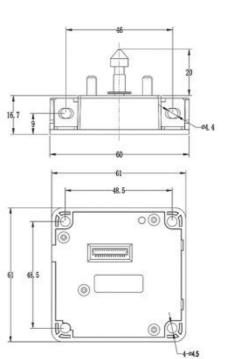



Material	ABS for lock body shell, Acrylic & PC for panel	
Power consumption	Load current < 200mA Standby current < 20mA	
Working voltage	CR123A rechargeable lithium battery Low voltage alarm: 2.4V±0.1V	
Working environment	Working temperature - 15°C ~ +65°C Working humidity 10% ~ 90%RH	
Anti-static	Air static 15KV Touch static 8KV	